The Interrelationships of Selected Asbestos Exposure Indices

JEREMIAH R. LYNCH, HOWARD E. AYER, and DOUGLAS L. JOHNSON*

Bureau of Occupational Safety and Health, Public Health Service, Department of Health, Education, and Welfare, 1014 Broadway, Cincinnati, Ohio 45202

Based on the assumption that the biological effect of asbestos is related to the concentration of respirable fibers, an index was developed which yields the concentration in numbers of asbestos fibers visible under 430× phase-contrast illumination. Data are presented relating this index to overall dustiness as measured by impinger counts and to absolute fiber concentration and distribution as measured by electron microscopy. The relation between count estimates and gravimetric measures of total dust and chrysotile asbestos deduced from magnesium analyses are given for gross and respirable samples. These relations are developed for use in operations in the manufacture of asbestos textile, friction, cement, and insulation products. The most convenient, practical, and direct index of asbestos fiber exposure proved to be the concentration of fibers longer than 5 microns counted on membrane filters at 430× phase-contrast illumination.

Introduction

AT THE NEW YORK ACADEMY OF SCIENCES Conference on the Biological Effects of Asbestos in 1965, Gilson[1] noted the proliferation of dust sampling methods and appealed for international comparability of dust measurement data to be related to biological data. He also observed that, as dust levels are lowered, it becomes more important to use the index that is biologically most appropriate.

At the present time the goal of international comparability has been partly achieved by *the adoption of the concentration in numbers* of fibers longer than 5 microns counted on membrane filter samples at 430× magnification with phase-contrast (PC) illumination as the standard method in both Britain and the United States.[2-4] However, information that would permit evaluation of the biological appropriateness of this index is still not complete.

It is rarely possible to make an absolute measurement of that characteristic of an airborne dust which is directly responsible for its biological effect. To be practical, measurement for the purpose of assessing hazard and evaluating control must not only be convenient and relevant but also permit the use of statistically adequate sampling strategies. To evaluate indices obtained from varying exposure situations, an examination of the consistency of their relation to other and absolute measures was undertaken.

The large number of methods which might be used to measure exposure to airborne dust containing fibers results from what might be called the "degrees of freedom" of the dust cloud. In measuring the concentration of a gas in air, there is only one attribute to be measured, and one accurate method gives the same result as another. With *granular* dust, however, the attribute could be either number or weight, and with *fibrous* dust, length gives another degree of freedom; furthermore,

*U.S. Department of Health, Education, and Welfare, Public Health Service, Region IX, Federal Office Building, 50 Fulton Street, San Francisco, California 94102.

The Interrelationships of Selected Asbestos Exposure Indices (1970)
ACL Doc 25434 · Page 1 of 7
Published by AsbestosClaims.Law
asbestosclaims.law/library/25434/1

a dust of *mixed* fibers and grains gives yet another.

Because of this variety of attributes, there could be as many as 100 indices of exposure to the asbestos in a dust cloud. In this United States Public Health Service epidemiological study of the asbestos products industry, the choice was narrowed down to the count and weight methods shown in Table I. Based on the results of analysis of almost 10,000 samples, this paper presents summaries of the relationships between these methods in order to (1) exhibit the effect of product and operation, (2) reveal the bias of the methods, and (3) evaluate the usefulness of the indices derived.

TABLE I
Selected Measures of Fiber Exposure

Count	Weight
Total dust in impinger at 100×	Total dust
Total fiber on MF at 430× PC	Respirable dust
Fibers >5 microns on MF at 430× PC	Chrysotile by magnesium
Total fiber on MF by electron microscope	Respirable chrysotile by magnesium

TABLE II
Impinger/Membrane Filter Count Ratios
(fibers/ml for 1 mppcf)

Product	Fibers			Number of Pairs
	Total	>5 μ	>10 μ	
Textile	10.3	5.9	2.7	500
Friction	3.7	2.2	1.0	283
Pipe	4.8[a]	1.9[a]	0.7	100

[a] Correlation coefficient not significant at 95%.

Impinger Relationships

The early epidemiologic data on asbestos were based on the impinger method and, until the beginning of the present study, most sampling in the United States was done by this method, since only in this way could the exposure be evaluated against the threshold limit value (TLV) of 5 million particles per cubic foot (mppcf).[4,5] Consequently, it is necessary to develop ratios between present methods of measurement and impinger counts performed in the traditional manner so that the results that would have been obtained years ago had present methods been used might be predicted.

The ratios shown in Table II were developed from simultaneous pairs of impinger–membrane filter samples and are expressed as the fiber counts equivalent to 1 mppcf by impinger. Equivalence means the fiber concentration that would be found, on the average, when the impinger samples were giving, on the average, a concentration of 1 mppcf in the same product area. The product areas are *textile* for asbestos spun and woven products, *friction* for brake linings and clutch facings, and asbestos cement pipe.

In all cases the correlation coefficients from the large numbers of pairs of simultaneous samples are not over 0.6, as would be expected from pairs of measurements of a real environment, each having its own intrinsic error and not necessarily measuring the same thing. The impinger results are counts of all visible particles, mostly grains with generally less than 20% fiber. These few fibers seen in the impinger sample are a small fraction of the fibers counted on the membrane filters, since the membrane filter is a more efficient collector of fibers and the magnification illumination used results in improved visibility. In the case of the impinger versus total and >5-micron fiber ratios in the pipe plants, the correlation coefficient was not significantly different from zero at the 95% confidence level, and the hypothesis that the measures of exposure are unrelated cannot be rejected. In this case a usable prediction ratio will probably need to be based on ratios calculated for subsets within pipe manufacturing operations.

Size and Visibility

To appraise the value of an exposure index based on measurement of only a part of the things which may have biological significance, it is necessary to examine how that part relates to the whole. A count of fibers longer than a stated length as seen through a precisely defined optical system may be chosen as an index in order to eliminate as a variable the microscopic system's resolving power. It follows, however, that some fibers that are seen will be below the stated length and others will be below the limit of visibility and will not be seen at all.

TABLE III
Fiber Size Distribution

Operation	430× Phase Contrast, % of Total Fibers: Longer than 5 μ	Longer than 10μ
Textile		
Fiber preparation and carding	50	25
Spinning, twisting, and weaving	61	38
Friction		
Mixing	68	30
Grinding, cutting, and drilling	63	31
Pipe		
Mixing	57	28
Finishing	58	27
Insulation		
Mixing	55	27
Finishing	50	29

TABLE IV
Ratio of 970× to 430× Fiber Concentrations (phase contrast)

Operation	Fibers: Total	>5 μ
Textile		
Fiber preparation and carding	2.0	2.1
Spinning, twisting, and weaving	1.8	1.9
Friction		
Mixing	1.1	1.1
Grinding, cutting, and drilling	1.0	1.1
Pipe		
Mixing	1.2	1.2
Finishing	1.6	1.8
Insulation		
Mixing	1.0	1.1
Finishing	1.8	2.0

The proportions of >5-micron and >10-micron fibers of all the fibers visible at 430× PC on membrane filters are shown in Table III, broken down by operation within product area. Despite the fact that the textile operations and the three mixing operations are all cases of secondary dust dispersion (that is, the small dust particles already exist in the bulk material and are being shaken loose) whereas grinding and finishing are primary dispersion (that is, the dust is being produced and dispersed simultaneously by mechanical abrasion), the proportions are quite consistent. Although mode of dispersion undoubtedly has an effect on the proportion of large particles, this effect apparently has a negligible influence on the number distribution of particles in the size range of biological significance. Similarly, the variation in bulk asbestos quality, from the long fiber used in textile to the short fiber used in pipe, has no apparent effect on the count proportions of fibers by length.

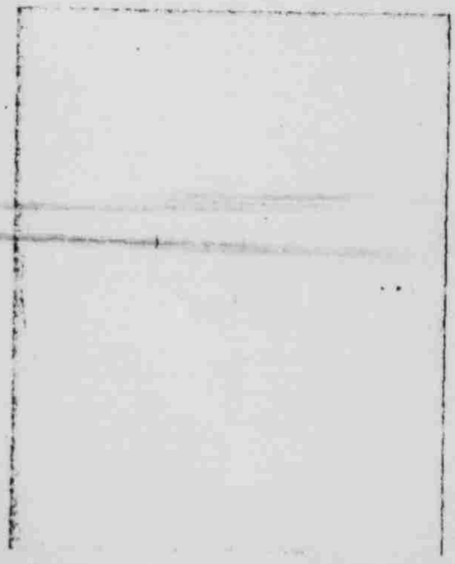


FIGURE 1. Chrysotile asbestos dust viewed at 430×, phase contrast.

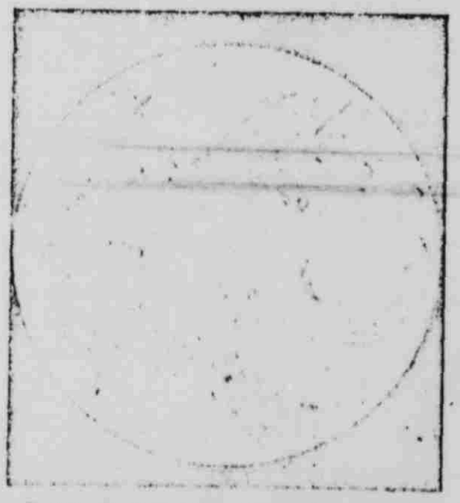


FIGURE 2. Chrysotile asbestos dust viewed at 970×, phase contrast.

Vorwald,[5] the toxicity long fibers ar this possibility results of re possibility und in England a fibers longer t tinued use of tion of visibil as well as on

The ratio 970× PC to same filter is sults are base of samples, a quite wide. the increase for fibers lon fibers. Thus, lution at this diameter. A in Figure 1 an

The elect tficient resolv tary chrysotile all dust part veloped a me dust particles tron microsco electron micr ferent operati ticle size analy that shown in the statistical important to tion of the length. Even are being coun 1/100 of the counted. Furt 430 × PC ma fibers > 5-micr total fiber co about twice as PC counts (T 10% of the t

Since all h measure only borne fiber c

Concentrations

Fibers >5 μ
2.1
1.9
1.1
1.1
1.2
1.8
1.1
2.0

s being produced
by mechanical
are quite con-
dispersion un-
ne proportion of
pparently has a
umber distribu-
nge of biological
ariation in bulk
ng fiber used in
m pipe, has no
t proportions of



os dust viewed at

Vorwald,[6] in his early animal studies of the toxicity of asbestos, suggested that the long fibers are more toxic than the short, and this possibility has been raised again by the results of recent investigations.[7] While this possibility undoubtedly influenced researchers in England and in the United States to count fibers longer than 5 microns, the present continued use of this index is based on the reduction of visibility variability, referred to above as well as on the biological implications.

The ratio of the number of fibers seen at 970× PC to those seen at 430× PC on the same filter is shown in Table IV. These results are based on a relatively small number of samples, and the confidence limits may be quite wide. They do, however, indicate that the increase in visibility is roughly the same for fibers longer than 5 microns as for total fibers. Thus, the critical factor in fiber resolution at this level of magnification is fiber diameter. A typical 430× PC field is shown in Figure 1 and a 970× PC in Figure 2.

The electron microscope, which has sufficient resolving power to reveal the elementary chrysotile fibril, permits measurement of all dust particles of interest. Fraser[8] has developed a method for the direct transfer of dust particles from membrane filters to electron microscope grids. A large number of electron micrographs of samples from the different operations were sized with a Zeiss particle size analyzer. Size distributions, such as that shown in Figure 3, were used to obtain the statistical parameters in Table V. It is important to note that only a small proportion of the fibers were over 5-microns in length. Even if it is assumed that all these are being counted at 430× PC, only 1/25 to 1/100 of the true number of fibers would be counted. Further, as was shown in Table IV, 430 × PC may count as few as half of the fibers > 5-microns visible at 970 × PC. Even total fiber counts at 430 × PC, which are about twice as high as over 5-micron 430 × PC counts (Table III), still include less than 10% of the true number of fibers in the air.

Since all light microscope methods can measure only a small part of the whole airborne fiber cloud, it is important to consid-

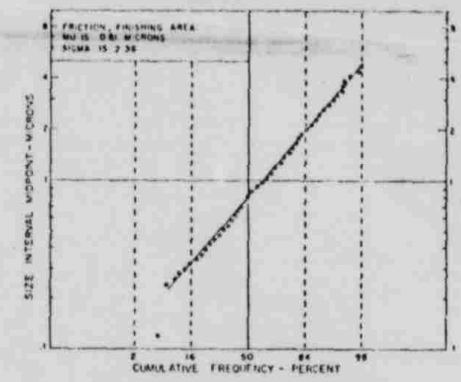


FIGURE 3. Fiber length distribution.

TABLE V
Fiber Size Distribution
(5000× electron microscope)

Operation	Count Median Length (μ)	σg	% >5 μ
Textile			
Fiber preparation and carding	1.4	2.0	4
Spinning, twisting, and weaving	1.0	2.0	2
Friction			
Mixing	0.9	2.3	2
Grinding, cutting, and drilling	0.8	2.4	2
Pipe			
Mixing	0.9	2.3	2
Finishing	0.7	2.2	1

er the use of electron microscope counts as an exposure index. Certain disadvantages, such as preparation time, equipment cost, and lack of general availability, are obvious. Several other problems should also be considered. Samples of a particle density appropriate for light microscope counting are too sparse for electron microscopy unless a very large number of fields are counted. Special techniques are required for random field selection to avoid counter bias. Most important is the occasional presence of large numbers of very small fibers (about 0.1-micron thick by 1.0-micron long) as seen in Figure 4. Since these small fibers often occur in groups, it is possible that they are airborne as clumps (of respirable size) rather than as single fibers.

A number of electron microscope preparations of samples previously counted by optical microscopy were made. The counts of longer fibers on electron micrographs did not ap-

Published by AsbestosClaims.Law
asbestosclaims.law/library/25434/4



FIGURE 4. Electron micrograph of chrysotile asbestos dust.

TABLE VI
Count/Weight Ratios

Product	Type of Fiber Count	Geometric Mean (fibers per μg)	Geometric Standard Deviation
Textile	Total	14,500	2.5
	>5 μ	6,700	3.3
	>10 μ	3,400	3.5
Friction	Total	26,400	3.4
	>5 μ	13,900	3.6
	>10 μ	5,300	4.4
Pipe	Total	46,500	2.8
	>5 μ	22,500	2.9
	>10 μ	8,300	3.4

pear to be greater than those obtained by optical microscopy. The technical difficulties involved in the preparation and counting of asbestos samples make quantitative conclusions impossible from the data obtained, but it appeared that the major difference between electron microscope counts and optical counts was in those fibers shorter than 1-micron. These small fibers, when they are present, dominate the electron microscope count. Even if the other technical difficulties mentioned could be overcome, what would result, from an electron microscope count method, would be fiber concentrations strongly biased by these very small fibers. Present evidence does not indicate that they should be given such a dominant role.

Weight Relationships

Differences between counters and certain statistical considerations make it difficult to obtain close agreement between counts even within a laboratory, and the differences are even greater between laboratories. These factors, plus the tediousness of counting, led industrial hygienists to seek weight methods of analysis wherever they are appropriate. Recent examples of this trend are the new weight TLV's for quartz and bituminous coal. This reasoning applied to asbestos led to the collection of many gross and respirable mass samples, analysis of which yielded some relationships between count-and-weight and among-weight methods.

Chrysotile asbestos and its parent rock, serpentine, are hydrated magnesium silicates containing a relatively constant 25% magnesium. Owing to the extremely high sensitivity of the atomic absorption spectrometer for magnesium (0.01 μg/ml for 1% absorption), it is possible to count asbestos fibers on one-half of a membrane filter at 430× PC and to analyze the other half for magnesium. In this way, the direct count/weight ratios shown in Table VI were obtained. Several difficulties with this method are readily apparent. Only chrysotile asbestos is determined; thus, the crocidolite used in some types of asbestos cement pressure pipes is not included in the weight of asbestos. Further, all other sources of magnesium, especially the nonfibrous parent rock associated with the chrysotile asbestos, interfere directly.

Although count data did not exhibit any consistent shift in fiber length distribution with product, operation, or mode of dispersion, the weight of asbestos, calculated from the magnesium content, gave decreasing fiber weight in this order: textile, friction, pipe (Table VI). When the count/weight ratios were used to convert the tentative TLV of 12 fibers (5 μ length) per milliliter to the equivalent gross weight concentrations of asbestos (based on magnesium determinations), the gross weight concentrations were 2 mg/m³ for textile, 1 mg/m³ for friction, and 0.5 mg/m³ for pipe. A single value for the weight TLV for all product areas would be equivalent to a fourfold difference in fiber threshold between textile and pipe plants.

Since only th
into the pulm
significant in
cases, a numb
means of resp
pling devices.
characteristics
the British M
respirable dus
membrane filt
ed at 430× P
without the el
ly, and the co
were used to
The finding th
microns were
reveals that m
enough to hav
ble range. Ot
using a Hexh
by side, were
nesium, giving
VIII. The 9
mean percent
of most of this
of dust found
with the asbe
sulted in Tabl
the product,
does not vary
However, the
pected in eith
dust will vary
to product.

Summary

The impin
and as the T
non-asbestos
source of erro
to asbestos.
are available
varying degre
ods that can
other dust sul
as the imping
centration co
the same total
tion, dependi
method for cl

ake it difficult to
tween counts even
the differences are
atories. These fac-
f counting, led in-
weight methods of
appropriate. Re-
end are the new
d bituminous coal.
asbestos led to the
nd respirable mass
yielded some rela-
t-and-weight and

its parent rock, ser-
magnesium silicates
onstant 25% mag-
tremely high sensi-
ption spectrometer
ml for 1% absorp-
ount asbestos fibers
ne filter at 430× PC
half for magnesium.
count/weight ratios
obtained. Several
thod are readily ap-
asbestos is deter-
olite used in some
pressure pipes is not
f asbestos. Further,
esium, especially the
associated with the
ere directly.

did not exhibit any
length distribution
or mode of disper-
tos, calculated from
ave decreasing fiber
extile, friction, pipe
count/weight ratios
tentative TLV of 12
illiliter to the equiv-
ntrations of asbestos
determinations), the
ons were 2 mg/m³
riction, and 0.5 mg/
value for the weight
as would be equiva-
nce in fiber threshold
plants.

Since only the dust capable of penetrating into the pulmonary air spaces is biologically significant in pneumoconiosis-producing diseases, a number of samples were collected by means of respirable-mass size-selective sampling devices. A horizontal elutriator having characteristics similar to those proposed by the British Medical Research Council[8] for respirable dust sampling was used ahead of membrane filters on which fibers were counted at 430× PC. A membrane filter sample without the elutriator was taken simultaneously, and the counts from the pair of samples were used to calculate the data in Table VII. The finding that 60% of the fibers over 10 microns were able to penetrate the elutriator reveals that many of the longer fibers are thin enough to have falling speeds in the respirable range. Other simultaneous sample pairs, using a Hexhlet and a gross dust filter side by side, were analyzed for asbestos by magnesium, giving the results shown in Table VIII. The 95% confidence intervals of the mean percent passing are typical of the range of most of this data. Use of the gross weight of dust found on these same samples, together with the asbestos by magnesium analyses, resulted in Table IX. The percent asbestos in the product, total dust, and respirable dust does not vary greatly for the same product. However, the percent of asbestos to be expected in either the total or the respirable dust will vary from 5% to 65% from product to product.

TABLE VII
Respirability of Textile Fibers by Count

Type Fiber Count	% Passing Elutriator
Total	84
>5 μ	60
>10 μ	60

TABLE VIII
Asbestos Dust Passing an Elutriator

Product	Mean Weight % Passing	95% Confidence Interval
Textile	31	24-38
Friction	29	21-37
Pipe	44	39-49
Insulation	22	19-25

TABLE IX
Asbestos in Product and Dust

Product	% Asbestos Content		
	Product	Total Dust	Respirable Dust
Textile	75-85	68	64
Friction	30-60	22	36
Pipe[a]	10-30	12	18
Shingle	10-30	25	28
Insulation[b]	5-15	4	6

[a] Not including crocidolite.
[b] Not including amosite.

Summary

The impinger measures all types of dust, and as the TLV for asbestos decreases, the non-asbestos dust present becomes a major source of error in the estimation of exposure to asbestos. Other count methods, however, are available to count asbestos fibers, with varying degrees of convenience. Weight methods that cannot differentiate asbestos from other dust suffer from the same disadvantage as the impinger in that the asbestos fiber concentration could differ by a factor of 10 for the same total or respirable dust concentration, depending on the product area. The method for chrysotile weight by magnesium analysis is not specific or general enough to form the basis for a threshold for asbestos.

Conclusions

Certain general statements are possible, based on the data presented:

1. There is, at present, no practical absolute method for the routine measurement of exposure to airborne asbestos fibers. The technical difficulties of the electron microscope for dust counting make its routine use unfeasible; when it is used, the results are heavily biased in favor of very small fibers.

2. Each of the methods considered measures something different and, therefore, they do not correlate well. Ratios between results by different methods should be used for qualitative prediction only.

3. Each method is strongly influenced by one attribute of the dust cloud. The biologically optimum method cannot be selected un-

less it is known which attribute is biologically most appropriate.

4. The preferred index of asbestos exposure is fibers longer than 5 microns counted on membrane filters at 430× phase contrast. The method of counting is convenient and practical, and fibers >5 microns constitute a direct index of asbestos fiber exposure.

References

1. Gibson, J. C.: *Man and Asbestos. Ann. N. Y. Acad. Sci. 132*: 9 (December 1965).
2. Committee on Hygiene Standards, British Occupational Hygiene Society: Hygiene Standards for Chrysotile Asbestos Dust. *Ann. Occup. Hyg. 11*: 47 (1968).
3. Edwards, G. H., and J. R. Lynch: The Method used by the U. S. Public Health Service for Enumeration of Asbestos Dust on Membrane Filters. *Ann. Occup. Hyg. 11*: 1 (1968).
4. Dreessen, W. C., J. M. Dalla Valle, T. I. Edwards, J. M. Miller, and R. R. Sayers: A Study of Asbestosis in the Asbestos Textile Industry. *Public Health Serv. Bull. 241* (1938).
5. Committee on Threshold Limit Values: *Threshold Limit Values of Airborne Contaminants*, American Conference of Governmental Industrial Hygienists (1969).
6. Vorwald, A. J., T. M. Durkan, and P. C. Pratt: Experimental Studies of Asbestosis. *Arch. Ind. Hyg. Occup. Med. 3*: 1 (1951).
7. Vigliani, E. C.: The Fibrogenic Response to Asbestos. *Med. Lavoro 59*: 6 (1968).
8. Fraser, D. A.: Absolute Method of Sampling and Measurement of Solid Air-Borne Particulates. *Arch. Ind. Hyg. Occup. Med. 8*: 412 (November 1953).
9. Medical Research Council, Dust Subcommittee, Industrial Pulmonary Disease Committee: Recommendations of the MRC Panels Relating to Selective Sampling. Minutes of Joint Meeting, London, March 4, 1952.

Received January 7, 1970

Radiation Publications

The International Commission on Radiation Units and Measurements has recently issued two new reports which are of interest to industrial hygienists dealing with radiation problems. These reports are:

ICRU Report 16: *Linear Energy Transfer*. This report defines the concepts of linear energy transfer and the methods of calculations of distribution of absorbed dose. The applications and limitations of the linear energy transfer concept are also covered. In a series of nine appendices measurement, range, distribution, dosimetry, and symbols are presented. An extensive bibliography is included. The publication may be purchased for $3.00 per copy.

ICRU Report 17: *Radiation Dosimetry: X-Rays Generated at Potentials of 5 to 150 kv*. In this report there are discussions of measurement of energy fluence, spectral distribution, measurements and absorbed dose. This publication may be obtained for $2.50 per copy.

Address orders or inquiries to ICRU Publications, P.O. Box 4869, Washington, D. C. 20008.

Proposed Revision

The American National Standards Institute is proposing to revise the following standard:

Z9.1-1951 *Safety Standard for Ventilation and Operation of Open-Surface Tanks*. This standard covers the protection of operators from contact with gases, vapors, mists, or liquids used in, created, related, released or disseminated by open-surface tank operations and the design of ventilating systems for controlling and removing said gas, vapors, or mist. This guide does not cover protection from fire.

Comments relative to the proposed revision of this guide will be welcomed by the Board of Standards Review and the comments should be received by November 24, 1970. Copies of the standard may be purchased from the American National Standards Institute, Department BSR, 1430 Broadway, New York, New York 10018.

Published by AsbestosClaims.Law
asbestosclaims.law/library/25434/7